



# Billboard2Go

## INSTRUCTIONS

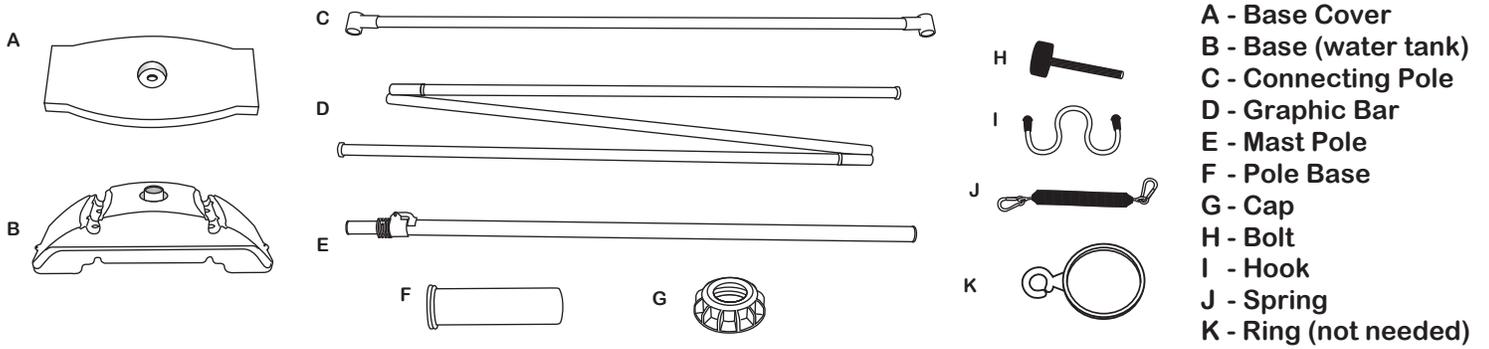


**Before Beginning:** Please remove all the plastic rings from the graphic bars (D). For easier assembly the graphic is sleeved and does not require the rings. **Note:** The metal rings on the bottom graphic bars stay on the bar.

### A. Assemble the Frame

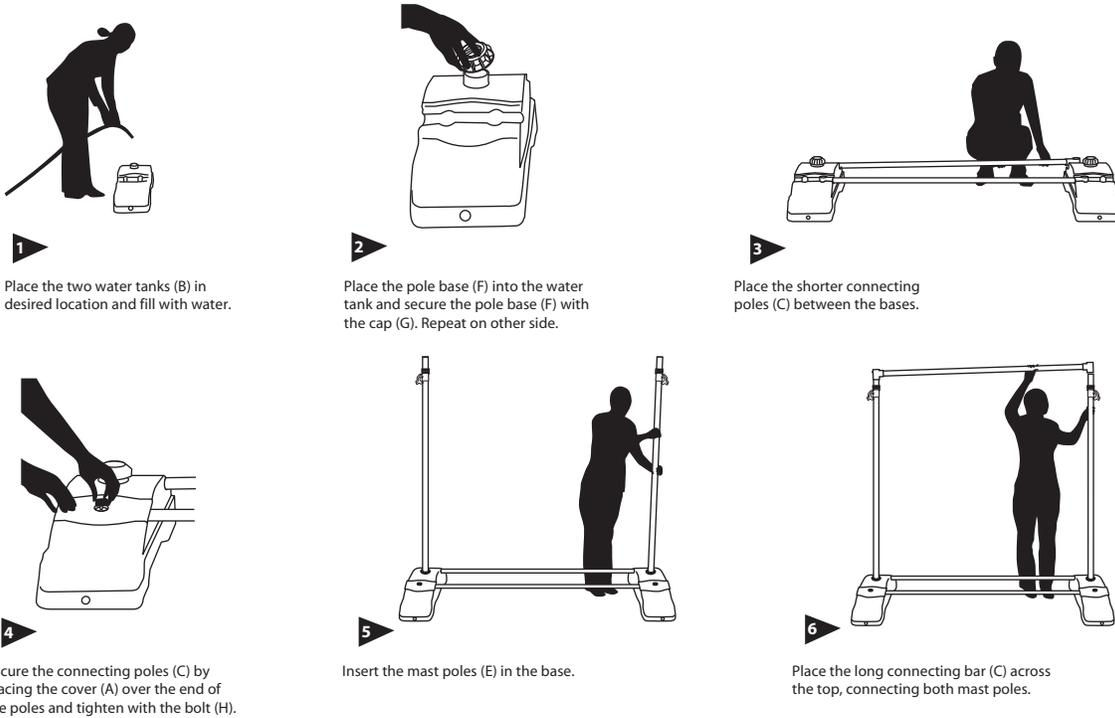

### B. Attach the Graphic

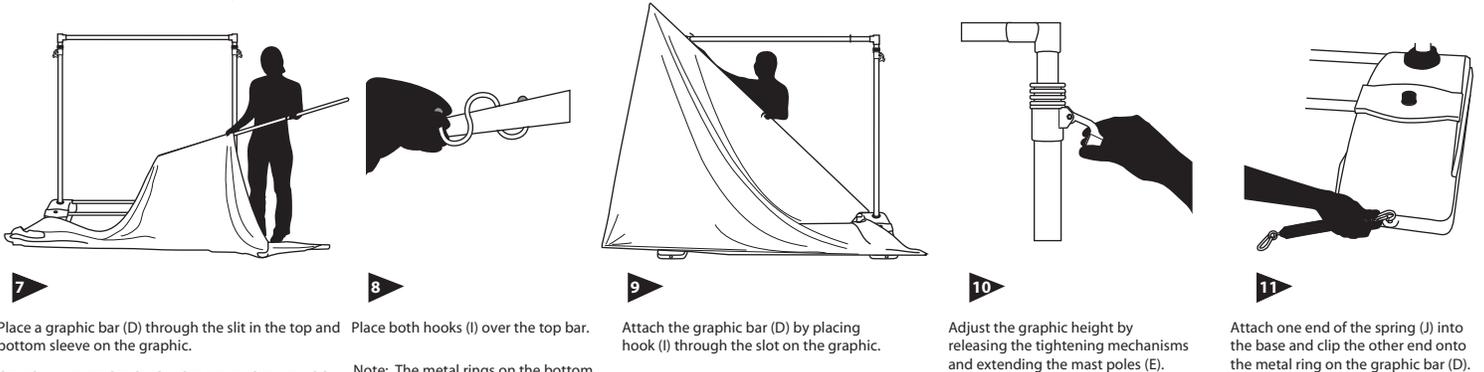

**SPECIAL DIRECTIONS FOR 66.5" GRAPHICS:** Before constructing graphic bar (D), remove one of the end caps and set aside. Carefully cut the bungee cord at both joints with a pair of scissors. Use the middle piece and one of the end pieces to re-construct a shorter graphic bar. Place the end cap in the open end.

**Note:** The metal rings on the bottom graphic bars (D) stay on the bar and fit within the slot in the graphic.

Adjust the graphic height by releasing the tightening mechanisms and extending the mast poles (E).

Attach one end of the spring (J) into the base and clip the other end onto the metal ring on the graphic bar (D). **Note:** Readjust the graphic height to tighten or loosen the graphic.